

!!! IMPORTANT !!!



READ ALL OF THIS TEXT, TO PREVENT INJURY AND AVOID MISTAKES

GUIDE TO INSTALLATION FOR TYPE: 'BIG-BOSS™'

STEP ONE: To get started, find the right location. Easy access top and bottom is essential. Make sure there is enough room to unfold the ladder (refer to Diagram / Table overleaf – Maximum Clearance at 60°).


IMPORTANT NOTE: CUT-OUT NOT TO BE WIDER AS SHOWN (770mm)

STEP TWO: *What you need to make the opening – Timber Joist (Fig. 1 and Fig. 2):* Timber, MPG10, 90x45mm pine or hardwood, about five (5) metres will be enough, pick a straight piece with minimal knots, and about 2 doz. 90mm long nails.

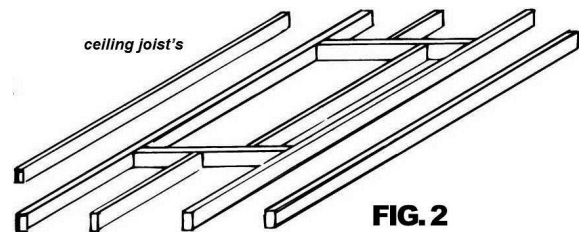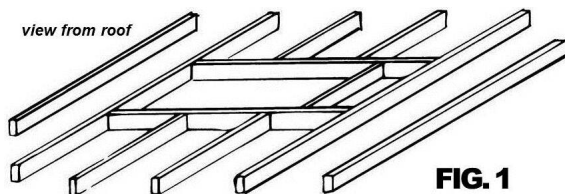

What you need to make the opening – Trusses (Fig. 3):

600mm centre trusses are not suitable for 'Big-Boss™' models. In some cases, with the approval of a Building Surveyor, the truss spacing can be modified to provide a clear space of 770mm between trusses. Buildings with light roofing such as metal, corrugated or stramit types, etc., may have truss spacings at 900mm centres, in which case Fig. 3 applies. 900mm centres should give you a clear distance of 865mm between, but **you need to measure** and cut two (2) trimmers ('A') to the right size to fit in between. Locate the trimmers to suit a hatch cut-out of 1220mm or 1520mm in length, depending on Model No. – they need to be nailed in square. Now cut and nail the third trimmer ('B') to form the width of 770mm in between. Smaller hatches can be manufactured at extra cost or refer to the 'Access-Boss™' series).

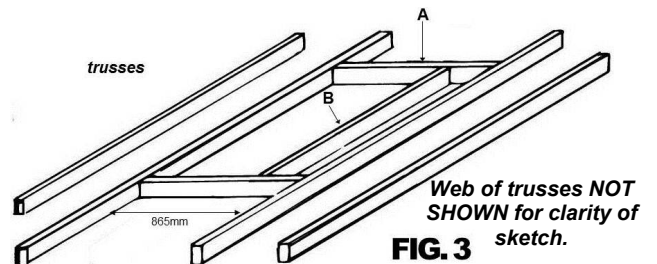

DO NOT CUT TRUSSES without Building Surveyor approval.

To mark out the opening on the ceiling: Either (from below) hammer nails through the plaster or (from above) measure from the top plates of the walls, which are usually visible. **DO NOT STAND** on the plaster ceiling or on timber joists that you had to cut, **before** it is nailed back to secure timber. A short plank is handy. It is best to do the timber work first, from above. Double check the cut out size and measure diagonally for square, if correct, cut out the plaster. You are now ready to install the unit.

Once the opening in the ceiling has been made, installation is a breeze.

!!! IMPORTANT !!!

READ ALL OF THIS TEXT, TO PREVENT INJURY AND AVOID MISTAKES

STEP THREE: Installation of the pull-down access ladder, into the readymade opening: Fit eyebolt to panel. Make sure opening end of hatch is where it should open and **have someone assist you** for 5 minutes to push the fully assembled access ladder into the ceiling, ensuring the architrave is hard against the plaster. The unit is now in the right position and **should not fall back out** - fitted Fixing Clips will take care of that. Gently open the hatch panel with the hook & pole supplied, by placing the hook through the eyebolt, (at this time, with one hand keeping pressure against the architrave at the opening end) immediately screw one screw (8 x Type 17 Hex screws 12-11 x 65mm supplied, or use similar) into each pre-drilled hole on either side at opening end through frame to timber to secure. Unfold the ladder. **DO NOT WALK ON THE LADDER AT THIS TIME.** Now screw remaining six (2x3) screws into the remaining pre-drilled holes. **The predrilled holes on either side of the metal plates must be used without exception.** You may have to loosen or tighten the eight (8) fixing screws on one side or the other to adjust the gap evenly on both sides between the architrave and the panel. Now all you have to do is adjust the ladder (two screws with lock nuts – refer Adjustment sticker inside frame), so that feet are on the floor and hinges are closed ie butted against each other, **finished.**

If you cannot get someone to help you: Remove the **ladder assembly only** from the panel, (4 or 6 nuts depending on model) to lighten the load. Make sure the hatch panel opens at the right end. With a rope, pull the hatch from above into the ceiling. Make sure the hatch-architrave is hard against the ceiling. Fix the frame by screwing the eight screws (supplied) through frame to timber to secure. From below open the hatch.

! ATTENTION ! Be careful - without the weight of the ladder it is possible for the panel to fly up.

Keep the ladder assembly nearby and fit it back on the panel with the 4 or 6 nuts. **Do not** over tighten the nuts. You may have to loosen or tighten the eight (8) fixing screws on one side or the other to adjust the gap evenly on both sides between the architrave and the panel. Now all you have to do is adjust the ladder (two screws with lock nuts – refer Adjustment sticker inside frame), so that feet are on the floor and hinges are closed ie butted against each other, **finished**.

You are now ready to enjoy your new access system.

!!! IMPORTANT !!!
READ ALL OF THIS TEXT, TO PREVENT INJURY AND AVOID MISTAKES

OPERATING AND MAINTANANCE PROCEDURE ON AM-BOSS ACCESS LADDERS.

AM-BOSS Access Ladders work on a reliable counter balance spring system.

OPENING

Engage hook on pole (supplied) into small eyelet on opening end of ceiling access panel. Gently pull door open till it comes to rest against the stops on the adjusting mechanism. No need to unhook the pole from the panel. With both hands unfold and extend the ladder to the floor.


CLOSING

With both hands lift up bottom section of ladder and fold back up on top of each other. With the use of the pole gently first push then ease panel back up till it is fully closed. The spring counter balance system will keep the panel shut.

MAINTENANCE

ALL MOVING PARTS ARE FACTORY PRE-LUBRICATED AND LUBRICATION SHOULD NOT BE REQUIRED FOR SOME TIME. HOWEVER SHOULD OPERATION OF THE UNIT BE IN EXCESS OF 3 TO 5 TIMES A DAY, ALL MOVING PARTS ARE TO BE LUBRICATED ONCE EVERY TWO MONTHS. MOST IMPORTANT IS THE LUBRICATION OF **THE PIVOT POINT** OF THE LINKAGE-ARMS JOINED TO THE SIDE PLATE WITH THE ADJUSTING SYSTEM. **THIS PART DOES MOST OF THE WORK.**

INSPECTION OF THE WHOLE SYSTEM MUST BE CARRIED OUT ONCE A YEAR AND ACTION TAKEN

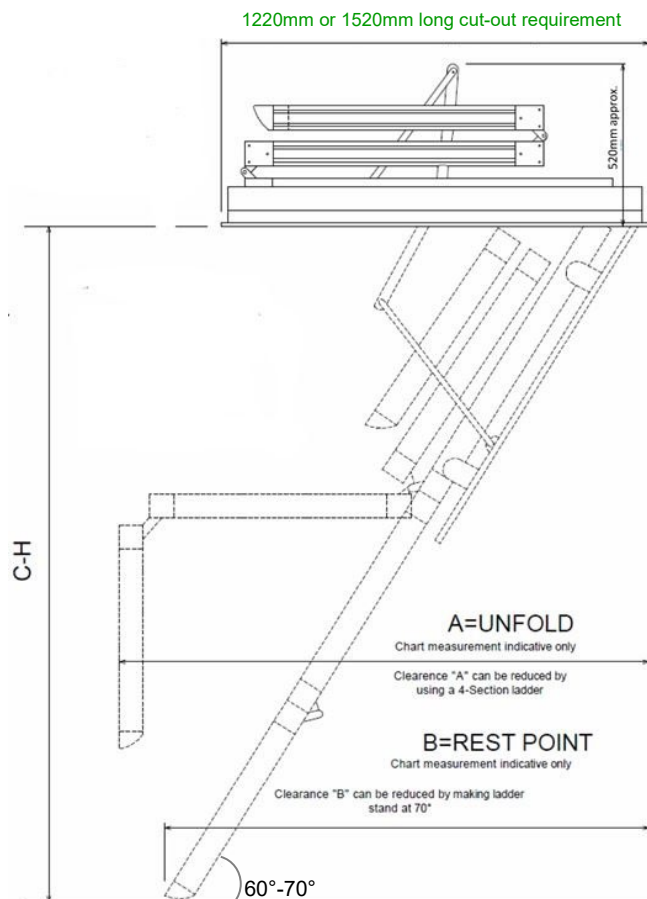

CUT OUT NOT TO BE WIDER AS SHOWN (770MM)			
Ceiling cut-out sizes: Model No's 2153 to 2680 - 1220mm x 770mm			
Ceiling cut-out sizes: Model No's 2830 to 3840* - 1520mm x 770mm			
* NOTE: Ceiling cut-out size for Model No.: 3840 for ceiling heights from 3950mm to 3995mm - 1620mm x 770mm			
MODEL	CEILING HEIGHT	UNFOLD (A)	REST POINT (B)
2153	2150mm-2295mm	1595mm	1465mm
2345	2300mm-2445mm	1670mm	1525mm
2460	2450mm-2595mm	1720mm	1555mm
2680	2600mm-2795mm	1830mm	1700mm
2830	2800mm-2995mm	1950mm	1790mm
3020	3000mm-3195mm	2050mm	1855mm
3240	3200mm-3395mm	2145mm	1970mm
3460	3400mm-3595mm	2210mm	2005mm
3680	3600mm-3795mm	Manufactured on-grade at 68° approx., to exact ceiling height	
3840	3800mm-3995mm		
From 4000mm Commercial Series Required Measurements and Cut-out To Be Advised			
NO ASSEMBLY, NO CUTTING, NO MISTAKES.			